

Assembly & Installation Guide

elfa® décor

Please read all of the instructions before beginning assembly and installation.

1

Place the Hanging Standards on the Top Track

Note: When the Top Track is going from wall to wall, you must start placing the hanging Standards on the Top Track at the notched location.(Fig. A). Slide the Hanging Standards down to their approximate position on the Top Track. Hanging Standards placed near the ends of the Top Track should be placed a minimum of 1/2"/15 mm from the ends of the Top Track. In order for the Drawers to fit, Hanging Standards should be placed in position (24"/60 cm on center) by using the spacer provided in the Drawer Frame package. (Fig. B)

Fig. A



Fig. B



2

Snap in the brackets.

Place the 16"/42 cm ventilated Shelf Brackets in the Hanging Standards at the desired Drawer heights. (Fig. C)

Fig. C




Install the "U" shaped metal drawer glide

The "U"-shaped metal drawer glide has three tabs and a metal knob on each side that locks the glide into the Bracket. The metal tabs and metal knobs are located at the top of the glide.

Start at the left, on the inside of the bracket. Align the metal tabs on the "U" shaped metal drawer glide with the cut out portions of the bracket. (Fig. D).

(Fig. E) shows the position of the tabs before being locked in place.

When aligned, hold the front tab in place and press on the "U" shaped metal drawer glide at the back rounded corner until you hear it lock into place. (see Fig. F and Fig. G). Repeat on the right side.

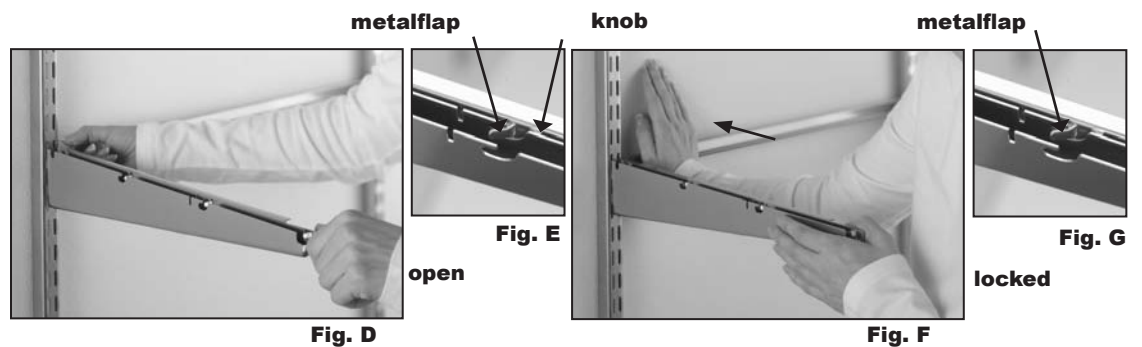


Helpful Hints

- elfa®- Drawer (height 85 mm) and Bracket take up three slots on the Hanging Standards
- elfa®- Drawer (height 185 mm) and Bracket take up six slots on the Hanging Standard - three open slots and three for the Bracket.
- elfa®- Drawer (height 285 mm) and Bracket take up ten slots on the Hanging Standard - seven open slots and three for the Bracket.
- A Gliding Dresser Shelf and Bracket take up three slots on the Hanging Standard.
- A Dresser Shelf and Bracket take up three slots on the standard.
- A Gliding Pant Rack and Bracket take up three slots on the standard. Spacing for pants folded over the rods should be based on the individual pant length but generally allow 30"/76 cm.

To adjust: With the glide in place, simply lift up both brackets at once, take them out an reposition.(Fig. H)

To remove: Place one hand at the back of the glide, with your thumb on the standard, gently push the glide forward with your fingers; at the same time insert and twist a small flat head screwdriver between the bracket and glide in front of the knob holding the glide in place (Fig. I). The glide should pop off. Repeat on the other side.

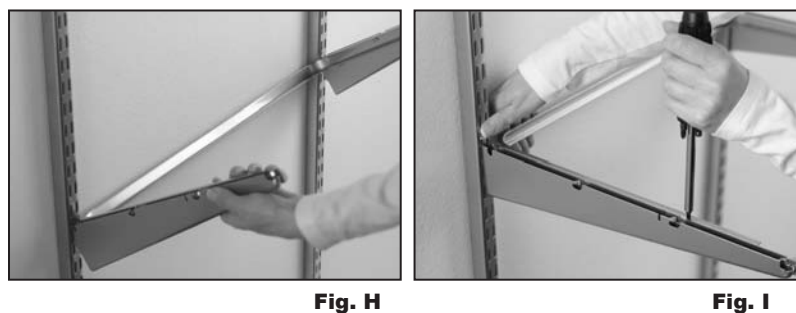

4

Insert the Wood Drawer Frame

- Always start with the bottom drawer and work up.
- Determine the back of the frame by locating the rollers.
- Align the rollers on each side of the frame with the openings in the metal drawer glide and slide the frame into glide. (Fig. J)
- Put the drawer in the opening and attach it to the left and right side of the drawer clips provided. (Fig. K & L)

Note: The Gliding Dresser Shelf and Gliding Pant Rack are installed the same as above.

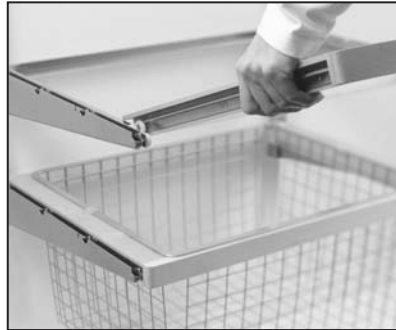


Fig. J



Fig. K



Fig. L

5

Installing a Dresser Shelf

- Snap in the Ventilated Shelf Brackets (one on each Hanging Standard) where you want the Dresser Shelf to go.
- The Dresser Shelf comes with three screws on each side which secure it to the brackets. The edge with the screws closest to it is the front. Set the shelf into the brackets, push it back until it locks in and then tighten the screws. (see Fig. M). If two Dresser Shelves share a bracket, you can only tighten the screws on one side.
- Once the shelf frame is in position, place the insert into the top of the frame. (see Fig. N)



Fig. M

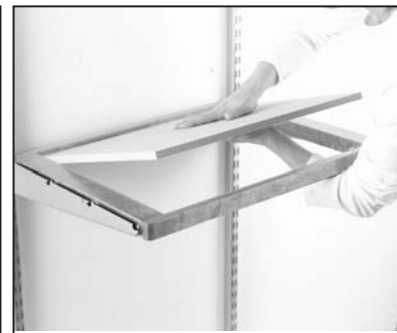


Fig. N

Installing the Double Shoe Rack

The Double Shoe Rack fits into the inside slots of the Hanging Standard allowing them to be aligned in a horizontal row end-to-end if desired.

For stacking vertically on Hanging Standards, an allowance of 10"/25 cm (or 6 open slots) between racks is needed to allow for shoes and easy access.



Installing the Fascia

Install Fascia on the Ventilated Shelves:

- Position the Fascia so the front support wires of the ventilated shelf fit into the top groove of the Fascia. (Figure A)
- Place Fascia Clips so they rest on the 4th and 5th wire from each end of the Fascia.
- To attach the Fascia, push the clips down and slide forward until they click into the Fascia's grooves. (Figure B)
- Once all Fascia is in place, the position of the Fascia can be adjusted so the ends of the Fascia are flush with the ends of the shelf. To re-position the Fascia, gently shift from side to side with the Fascia Clips in place.
- After all Fascia is in the desired position, complete the installation by securing the Fascia Clips with the screws provided. Do not over tighten as you may strip the screws. (Figure C)




Installing the Gliding Tie and Belt Rack

The Tie and Belt Rack attaches to the bottom of the Ventilated Shelf and pulls out from the shelf. It is designed to allow a closet rod to run through it. Allow 36"/90 cm of clear space below the rack for ties and belts.

Attaching the Gliding Tie and Belt Rack to the Ventilated Shelf:

- The "U" shaped part is the front. Position the product where you want it under the shelf so that the front and back hooks fit between two front to back shelf wires.
- Attach the front hook by inserting it at the back of the shelf in between the two wires that run left to right.
- Attach the front hook by pushing it back and then up to hang it over the top of the first wire from the front of the shelf that runs left to right.
- To remove the product, take the front hook off by pushing back and downward. The back hook will then pull straight out of the Shelf.

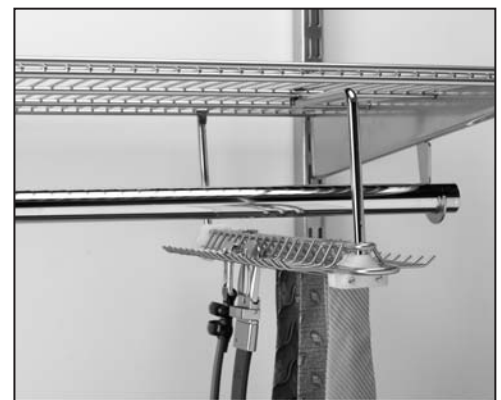

Elfa International AB

Elfagatan 5, SE-593 87 Västervik, Sweden

Tel: +46 490 846 00. Fax: +46 490 846 25.

E-mail: info@elfa.com

www.elfa.com

elfa[®]